

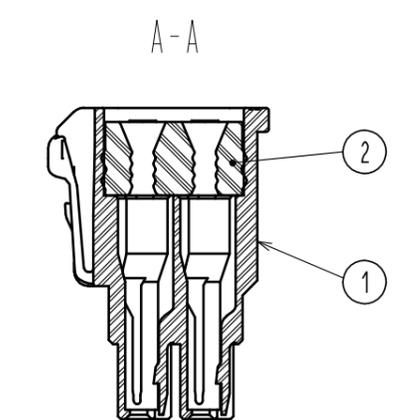
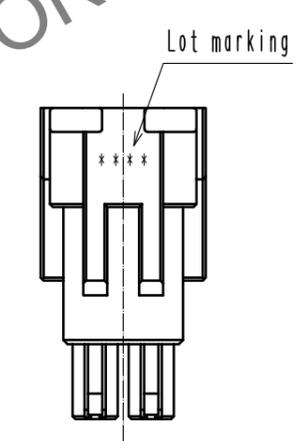

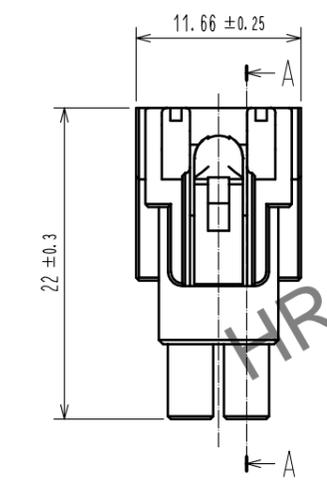
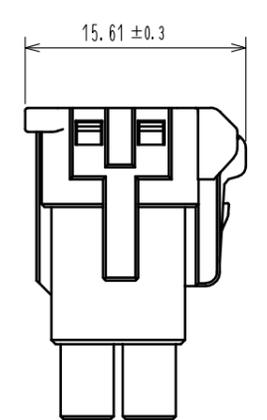
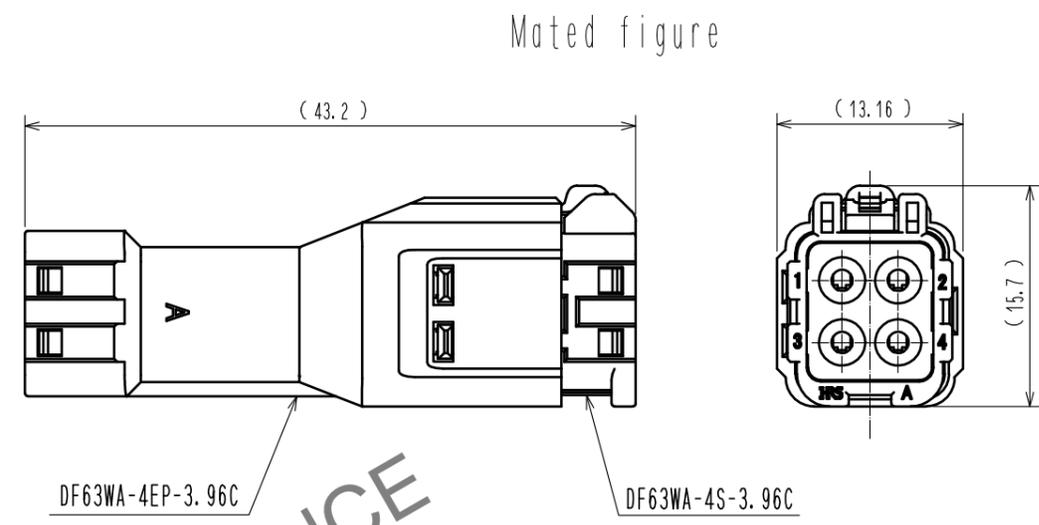


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

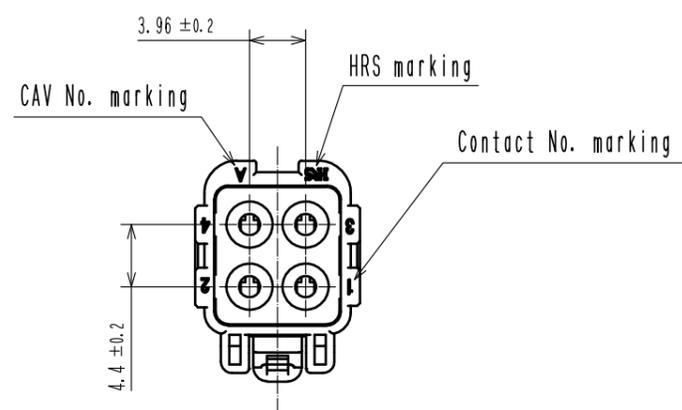

- Notes.
- 100 pcs. / pack
  - Applicable cable dia :  $\phi 1.7 \sim \phi 2.4$ mm
  - The dimensions in parenthesis are reference dimensions.
  - Always refer to the manuals below for operation of this product.  
For cable assembly / ETAD-H0814

1	PBT	UL94V-0 (Black)	2	Silicone rubber	Green		
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 2 : 1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
<b>HRS</b> HIROSE ELECTRIC CO., LTD.		APPROVED : KI. AKIYAMA	15.01.08	DRAWING NO.	EDC-359261-00-00		
		CHECKED : HK. UMEHARA	15.01.08	PART NO.	DF63WA-4S-3.96C		
		DESIGNED : TO. HORII	15.01.08	CODE NO.	CL680-0619-3-00		
		DRAWN : TO. HORII	15.01.08		1/1		