


Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

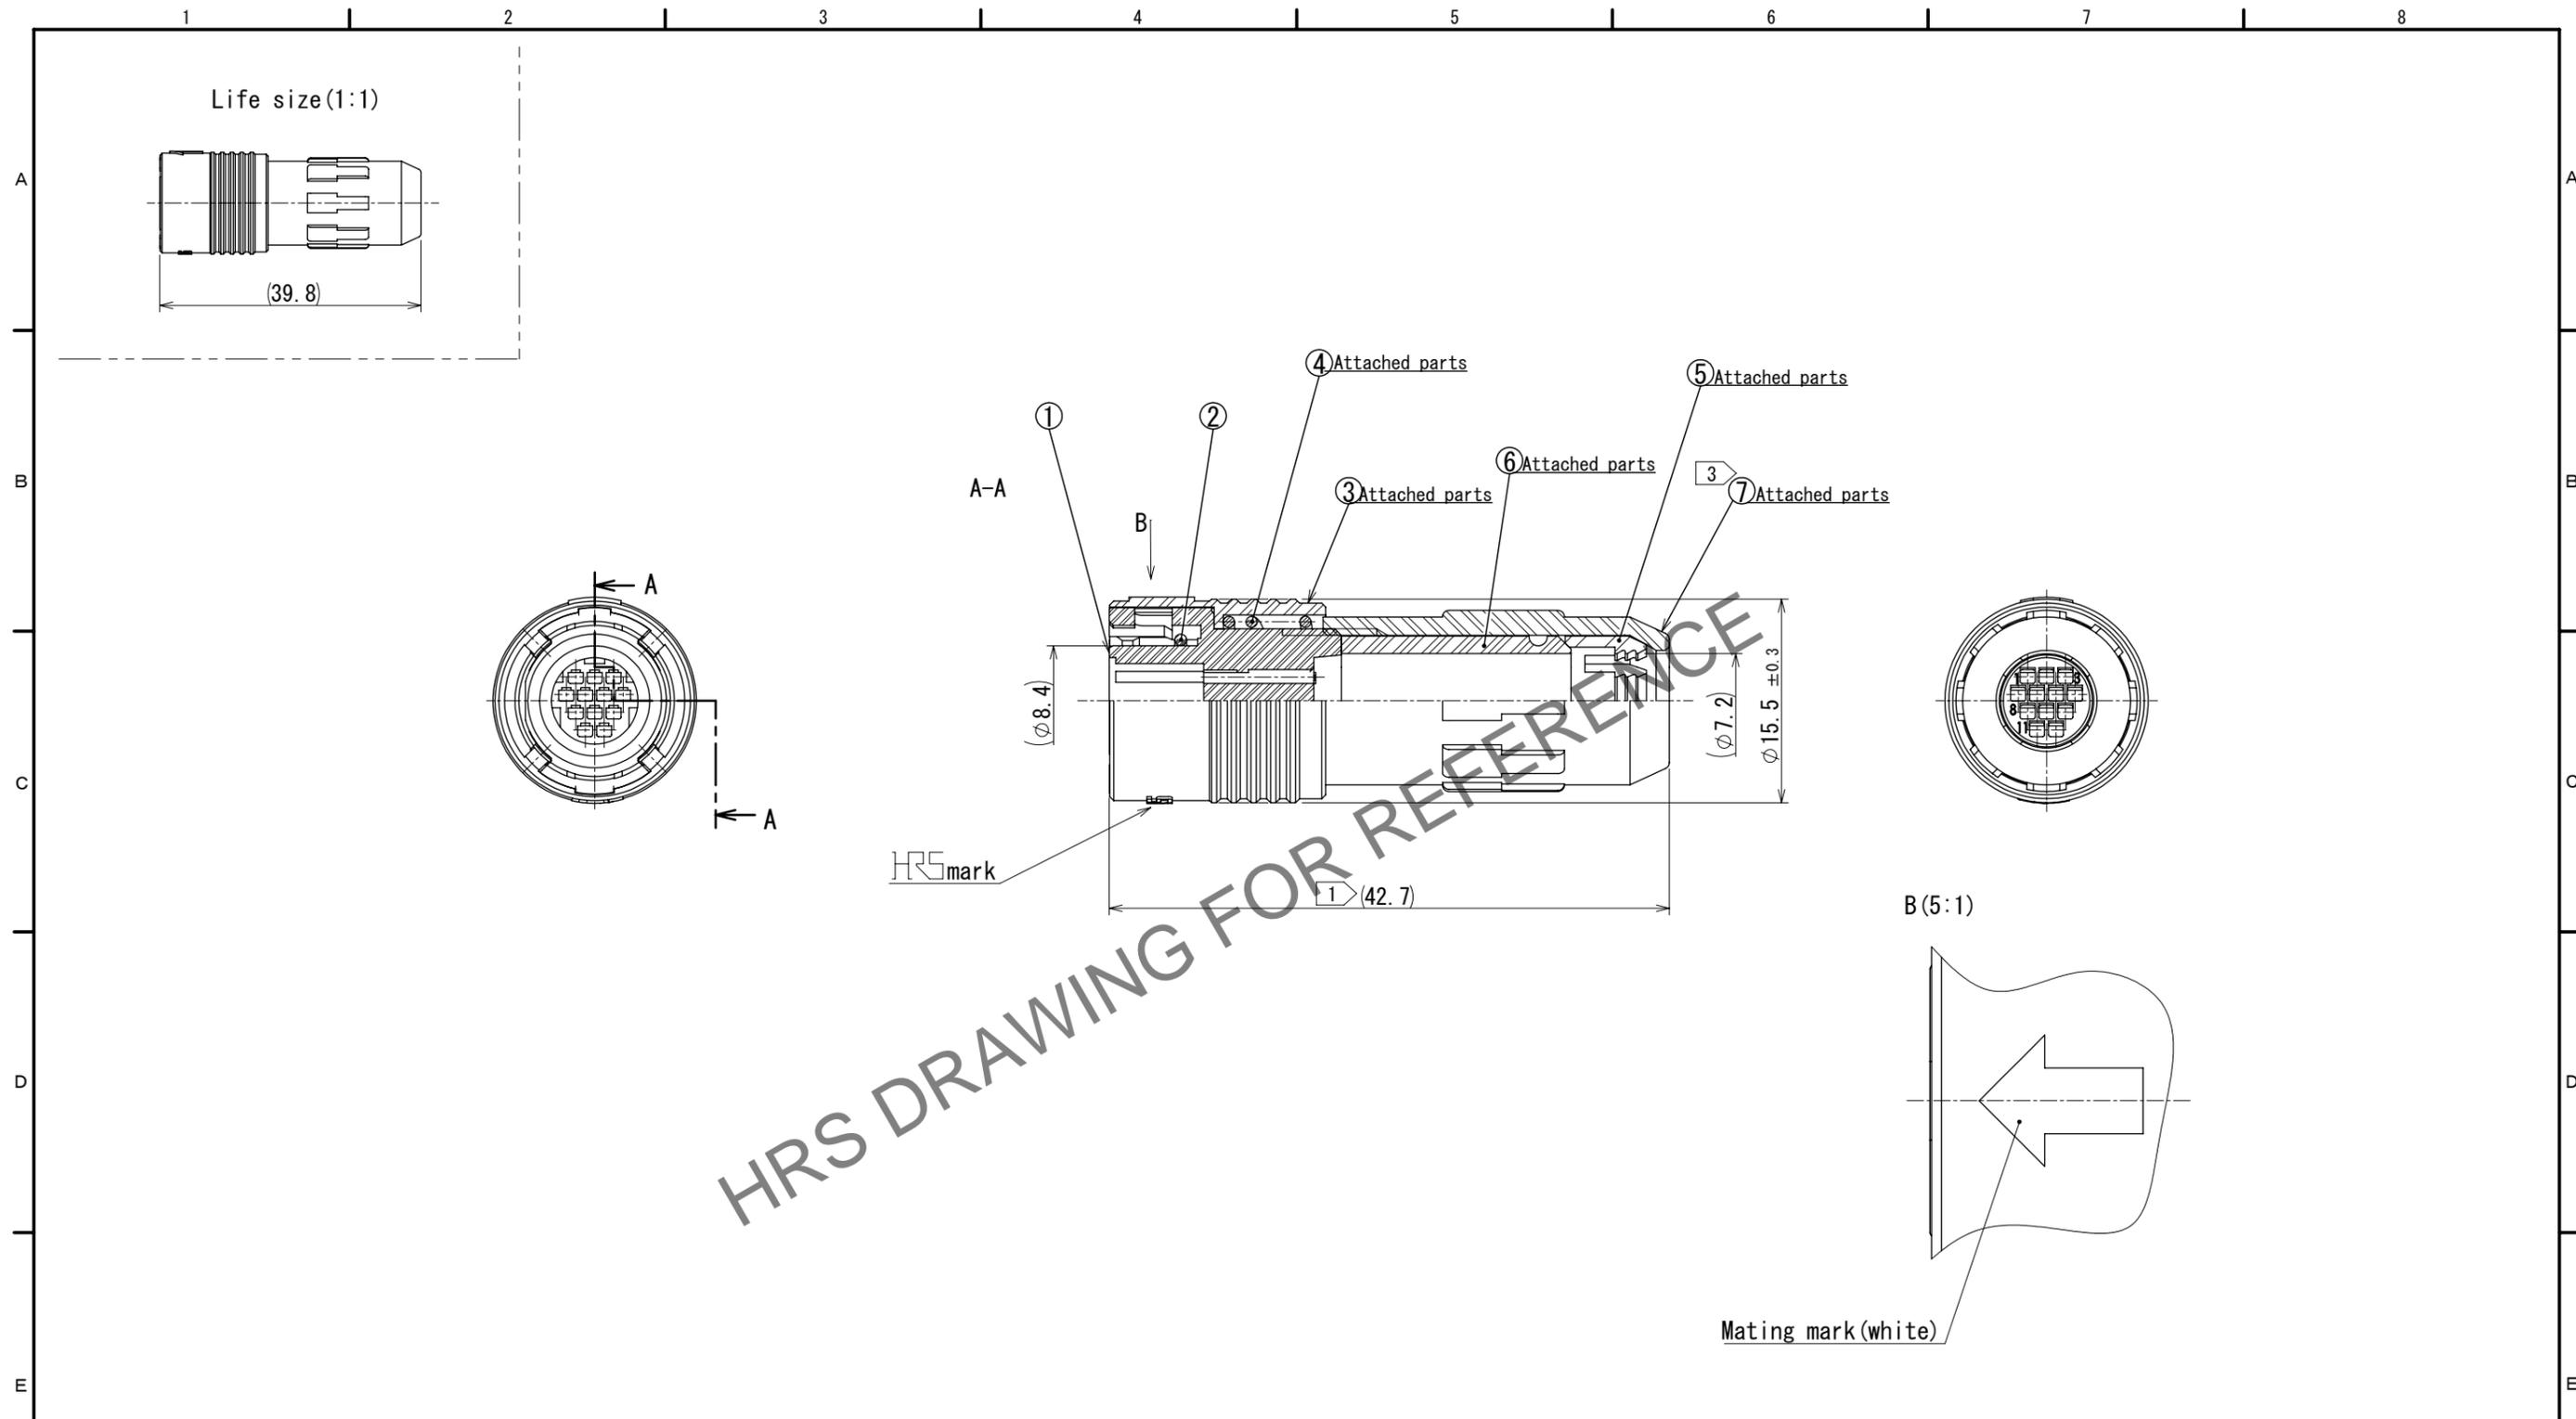

- Notes
- ① Total length becomes 39.8 ± 1 when Ref. No. ⑦ is screwed into Ref. No. ① completely.
 - ② Applicable crimping contact: HR30-PC-211
(Applicable wire: 26-30 AWG wire jacket diameter: $\phi 1$ MAX)
Applicable crimp contact extraction tool: HR30-TP
 - ③ The recommended clamp torque of Ref. No. ⑦ to be 0.45 to 0.5N · m.
To prevent loosening, apply LOCTITE 263 and LOCK PRIMER 7649 manufactured by HENKEL JAPAN Co., Ltd. according to the Loctite Coating Procedure Manual (ETAD-C0151-00).
Spacer for assembly is available HR30-8P-T02.
Table for assembly is available HR30-8P-12PC-T01.
 - ④ The cable pull and twisting strength, waterproof tightness and other characteristics may differ, depending on the cable structure, please confirm before the use.
 - ⑤ The assembly this product applies to the manual ETAD-C0509-00.

△ CAD change

4	Stainless steel							
3	Polybutylene terephthalate	(Black) UL94V-0	7	Polyphenylene sulfide	(Black) UL94V-0			
2	Silicone rubber	(Red)	6	Chloroprene rubber	(Black)			
1	Polyphenylene sulfide	(Black) UL94V-0	5	Polyacetal	(Natural:Milky white)			
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS	
UNITS		SCALE	COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
mm		2:1	1	DIS-C-00016301		HY. KISHI	HY. KOBAYASHI	2023. 10. 12
HRS HIROSE ELECTRIC CO., LTD.		APPROVED	MR. YOSHIDA	2005. 01. 05	DRAWING NO.		EDC-112397-71-71	
		CHECKED	MO. SATOH	2005. 01. 05	PART NO.		HR30-8P-12PC (71)	
		DESIGNED	YH. YAMADA	2005. 01. 05	CODE NO.		CL0130-0015-8-71	
		DRAWN	YH. YAMADA	2005. 01. 05				